
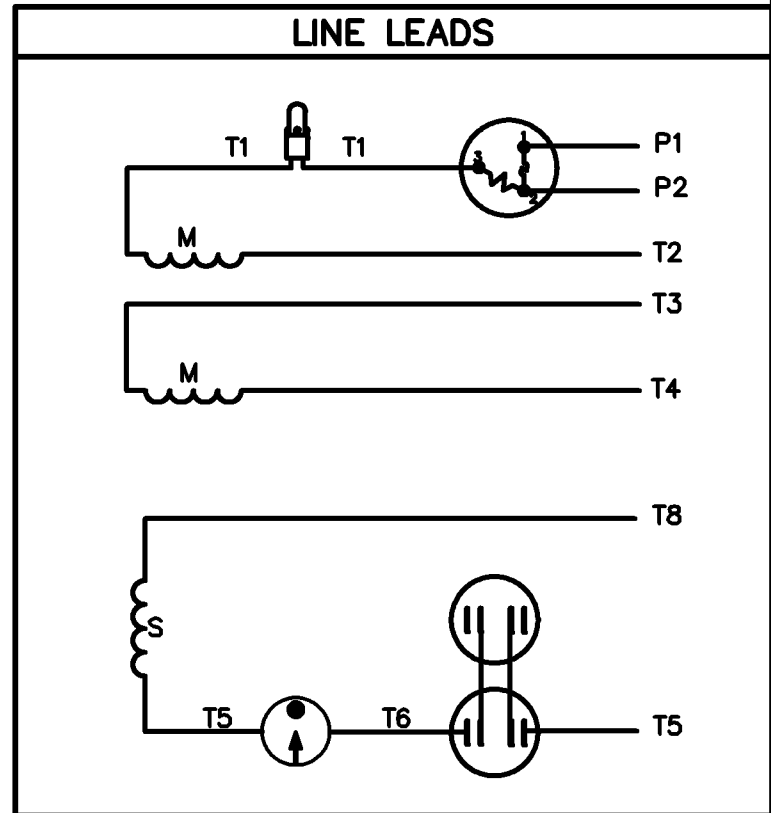


VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

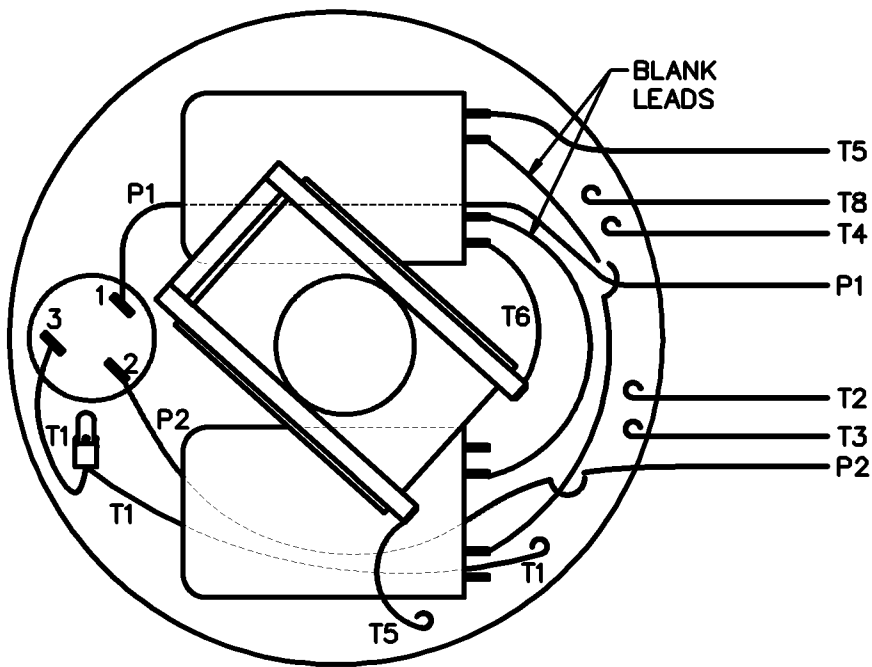

	ROTATION FACING LEAD END	L1	L2	JOIN	INSULATE SEPARATELY
HIGH VOLT	C.C.W.	P1	T4 T5	T2, T3 T8	P2
	C.W.	P1	T4 T8	T2, T3 T5	P2
LOW VOLT	C.C.W.	P1	T2, T4 T5	P2, T3 T8	-----
	C.W.	P1	T2, T4 T8	P2, T3 T5	-----

LEAD WIRE INSULATION MUST EXTEND MIN 1/4" INTO CONNECTOR INSULATION

DECAL - 004011

TOLERANCES UNLESS OTHERWISE SPECIFIED

DEC.	INCHES	METRIC
.X	±.1	±2.5
.XX	±.01	±.25
.XXX	±.005	±.127
.XXXX	±.0005	±.0127

LEESON ELECTRIC CORPORATION

NO.	REVISION	BY & DATE	CHK'D.	FRACTIONS	ANGLES	REF.	FINISH	REV.	DRAWING NO.
1	REDRAWN ON CAD	EPB 2/14/01		±1/64	±1/2'	PG.1		1	005075 PG.2
						FMF A6C17XC1A			

TITLE: EXTERNAL WIRING DIAGRAM EXPLOSION PROOF

MAT'L TYPE "C" W/ PROTECTOR - DUAL VOLT DUAL ROT. - DBL. CONTACT SWITCH

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT