

3-Wire *pico fast*® Cordsets, Snap Lock (Locking Sleeve)

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 4 A



Housing Style	Part Number	Cable	Features	Pinout
<p>PKG ..Z**</p>	PKG 3Z-*	AWM PVC Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF50642-*M <sup>†</sup>	<i>flexlife</i> ®	<p>1. BN 3. BU 4. BK</p>
	PKG 3Z-*/S90	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50587-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	
	PKG 3Z-*/S90/S101	AWM PUR Black 3x26 AWG 105°C 4.4 mm OD Cable #RF50723-*M <sup>†</sup>	<i>Cut/Abrasion Immune, flexlife-10, High Flex - Over 10 Million Cycles</i>	
	PKG 3Z-*/S90/S618	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50601-*M <sup>†</sup>	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>	
	PKG 3Z-*/X0R	PVC Orange 3x24 AWG 80°C, 250° C short term 4.4 mm OD Cable #RF04449-*M <sup>†</sup>	<i>Weld Flash Immune, High Temp. Immune</i>	
	PKG 3Z-*/S760	AWM PVC Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50585-M <sup>†</sup>	<i>flexlife</i>	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.



\*\* Standard coupling material is POM.. "PKG..Z".

† See Section N for *reelfast*® cable information.

## 3-Wire *picofast*® Cordsets, Threaded Coupling Nut

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 125 VAC/VDC, 4 A

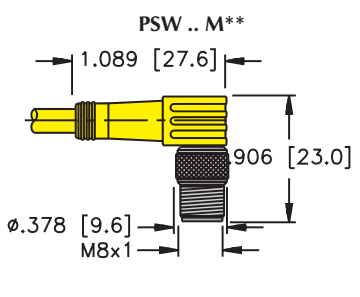

Housing Style	Part Number	Cable	Features	Pinout
 <p>PSW .. M**</p> <p>1.089 [27.6]</p> <p>0.378 [9.6] M8x1</p> <p>9.06 [23.0]</p>	PSW 3M-*	AWM PVC Yellow 3x24 AWG 105°C 4.4 mm OD Cable #RF50642-*M†	<i>flexlife</i> ®	 <p>1. BN 3. BU 4. BK</p>
	PSW 3M-*/S90	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50587-*M†	<i>Cut/Abrasion Immune</i>	
	PSW 3M-*/S90/S101	AWM PUR Black 3x26 AWG 105°C 4.4 mm OD Cable #RF50723-*M†	<i>Cut/Abrasion Immune, flexlife-10, High Flex - over 10 Million Cycles</i>	
	PSW 3M-*/S90/S618	AWM PUR Black 3x24 AWG 105°C 4.4 mm OD Cable #RF50601-*M†	<i>Cut/Abrasion Immune, EMI/RFI Protection</i>	
	PSW 3M-*/S760	AWM PVC Black 3x24 AWG 105°C 4.5 mm OD Cable #RF50585-*M†	<i>flexlife</i>	
	PSW 3M-*/XOR	PVC Orange 3x24 AWG 80°C, 250°C short term 4.4 mm OD Cable #RF04449-*M†	<i>Weld Flash Immune, High Temp Immune</i>	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.

\*\* Standard coupling material is nickel plated brass.

† See Section N for *reelfast*® cable information.